


HYDRAULIC COIL TILTER


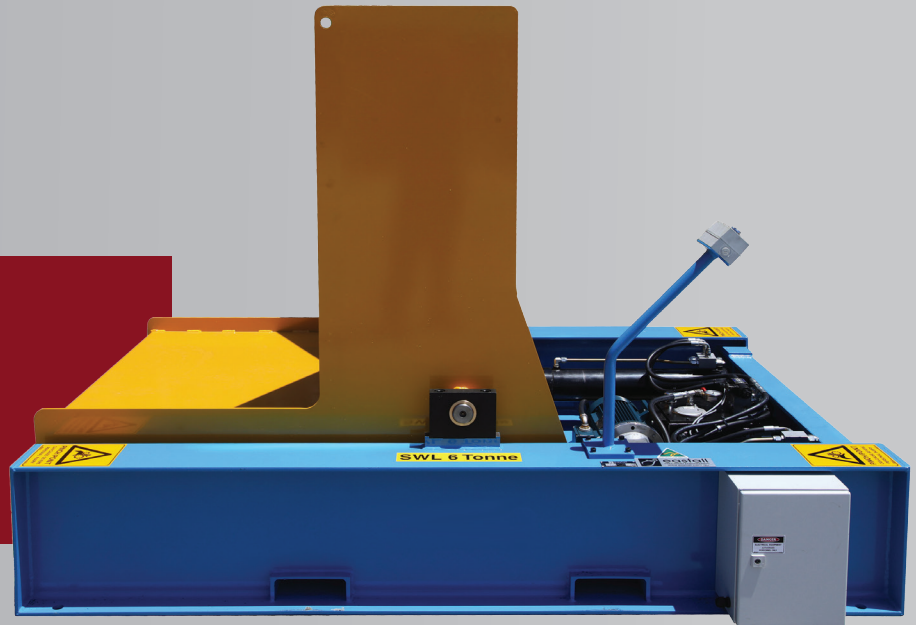


FOR CLARITY IMAGES DO NOT SHOW ANY SAFETY GUARDING

The Eastall Hydraulic Coil Tilter is an upender for tilting coils of steel from a vertical to a horizontal bore position enabling safe loading to an Uncoiler machine. It is hydraulically driven and can be stopped with the load held at any point in the turning process. This machine is robust, easily maintained and reliable with quality Australian-sourced componentry. Our 6 tonne model is standard and we can also manufacture to suit the tonnage required.

Safety aspects (on standard model)

- **Start switch delay** - on turning the start switch there is a two second delay before commencement of operation.
- **Audio visual warning** - turning the start switch immediately operates an orange flashing light and audible siren for the two seconds prior to commencement of operations and throughout the entire cycle of the machine.
- **'Deadman' start switch** - the start switch has to be continually held in place by the operator during the cycle of the machine. releasing the start switch will automatically cease operation of the machine.
- **Separate operator console** - we offer the option for the manual controls to be mounted away from the coil tilter for increased visibility.
- **Fork tyne slots** - for safe and easy transportation and manoeuvring.

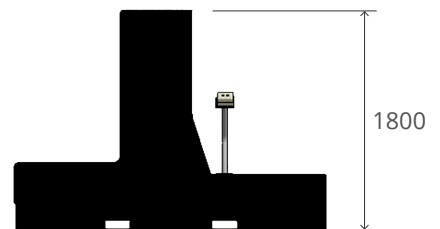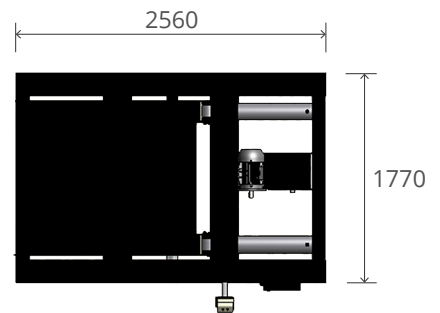

Weight: 2000 kg
Working Load Limit (WLL): 6000 kg

OPTIONAL EXTRAS

- MESH GUARDING (if not installing your own)
- NARROW COIL STABILISERS
- CUSTOM PAINT COLOURS AVAILABLE



YOUR DETAILS

Name	<input type="text"/>	Company name	<input type="text"/>
PH:	<input type="text"/>	E-mail	<input type="text"/>

JOB DETAILS

Max Coil Diameter	<input type="text"/>	mm	Min Coil Diameter	<input type="text"/>	mm
Max Coil width	<input type="text"/>	mm	Min Coil width	<input type="text"/>	mm
Max Coil weight	<input type="text"/>	kg			

GUARDING REQUIRED? YES / NO

DO YOU HAVE COLOUR REQUESTS? (otherwise standard blue used)

COMMENTS / REQUESTS